

LATCH LOCK

ES Gatillo Simple DE Klinkenzug
IT Gancia Sgancia PT Gatilho Simples FR Crochet Ouverture Graduée


● Cad Insertion Point

GS



Patented

Max. 150°C

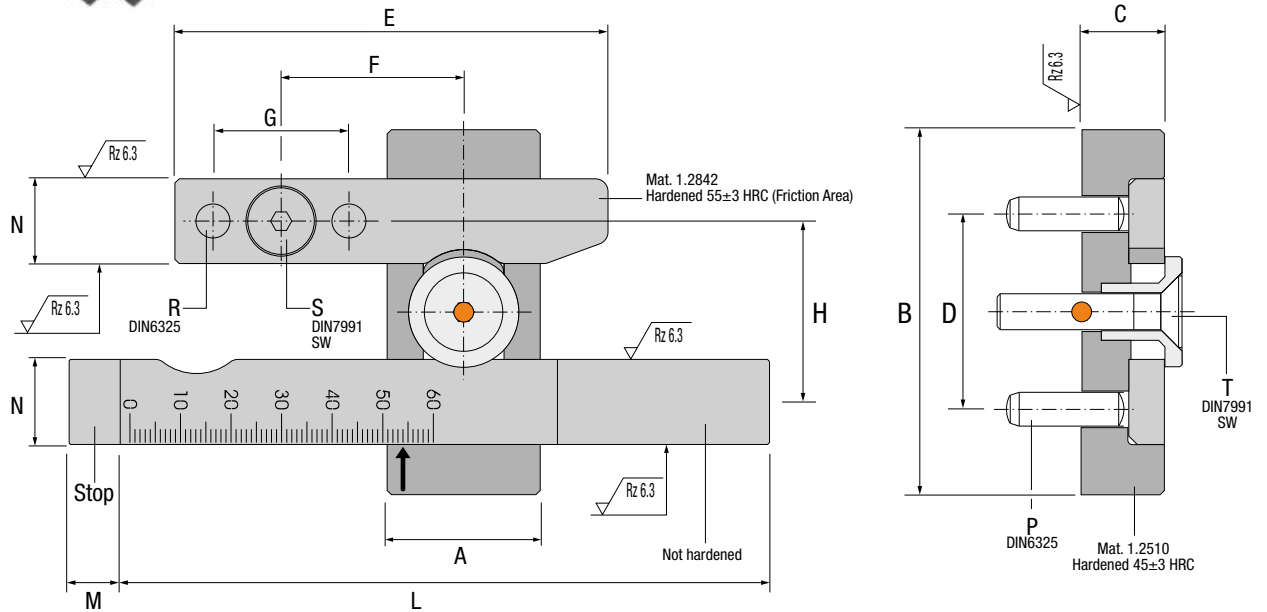

IMPORTANT !
After selecting the required stroke, fix the scale lever.
Después de seleccionar el recorrido deseado, fijar la leva graduada.
Nach der Wahl des gew. Hubes befestigen Sie die skalierte Leiste.
Dopo aver selezionato la corsa richiesta, fissare la riga graduata.
Depois de seleccionar o curso adequado, fixe a régua graduada.
Après avoir sélectionnée la course d'ouverture, fixer la règle graduée.

Ref.	A	B	C	D	E	F	G	H	L	M	N	P (x2)	R (x4)	S (x2)	T	V	Scale	SW
GS.226616	22	66	16	38	75	30	25	32	105	10	15	Ø6x20	Ø6x30	M6x30	M6x35	10	40	4
GS.368619	36	86	19	46	102	43	32	42.7	153	12	20	Ø8x24	Ø8x36	M8x35	M8x40	11.5	60	5
GS.421024	42	106	24	56	124	51	40	50.2	190	15	24.5	Ø10x30	Ø10x40	M10x40	M10x45	14	80	6

Installation Guidelines

Consejos de Instalación · Richtlinien zur Installation · Consigli di Installazione · Instruções de Instalação · Mode d'Installation

