


# C4516

## Náustek s vnitřním závitem



Hydraulická rychlospojka dle ISO 16028


**Pracovní teplota s NBR těsněním:** -20°C do +100°C

**Pracovní teplota s FPM těsněním:** -20°C do +180°C (na poptání)

**Materiál standardní verze:**

Kalená ocel

Těsnění - NBR

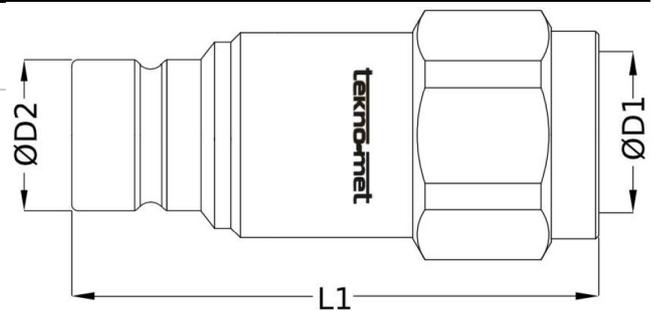

| kód           | velikost | D1         | D2   | L1 | SW | těsnění |
|---------------|----------|------------|------|----|----|---------|
| C4516/6-G14   | 6        | G 1/4"     | 16   | 48 | 22 | NBR     |
| C4516/6-N14   | 6        | NPT 1/4"   | 16   | 48 | 22 | NBR     |
| C4516/10-G38  | 10       | G 3/8"     | 20   | 62 | 25 | NBR     |
| C4516/10-G12  | 10       | G 1/2"     | 20   | 68 | 27 | NBR     |
| C4516/10-N38  | 10       | NPT 3/8"   | 20   | 62 | 25 | NBR     |
| C4516/10-N12  | 10       | NPT 1/2"   | 20   | 68 | 27 | NBR     |
| C4516/12-G12  | 12       | G 1/2"     | 24,5 | 69 | 30 | NBR     |
| C4516/12-G34  | 12       | G 3/4"     | 24,5 | 69 | 30 | NBR     |
| C4516/12-N12  | 12       | NPT 1/2"   | 24,5 | 69 | 30 | NBR     |
| C4516/12-N34  | 12       | NPT 3/4"   | 24,5 | 69 | 30 | NBR     |
| C4516/16-G34  | 16       | G 3/4"     | 27   | 75 | 35 | NBR     |
| C4516/16-N34  | 16       | NPT 3/4"   | 27   | 75 | 35 | NBR     |
| C4516/19-G1   | 19       | G 1"       | 30   | 84 | 46 | NBR     |
| C4516/19-N1   | 19       | NPT 1"     | 30   | 84 | 46 | NBR     |
| C4516/25-G114 | 25       | G 1-1/4"   |      | 90 | 55 | NBR     |
| C4516/25-N114 | 25       | NPT 1-1/4" |      | 90 | 55 | NBR     |