

# C4516

## Náustek s vnitřním závitem



Hydraulická rychlospojka dle ISO 16028


**Pracovní teplota s NBR těsněním:** -20°C do +100°C

**Pracovní teplota s FPM těsněním:** -20°C do +180°C (na poptání)

**Materiál standardní verze:**

Kalená ocel

Těsnění - NBR

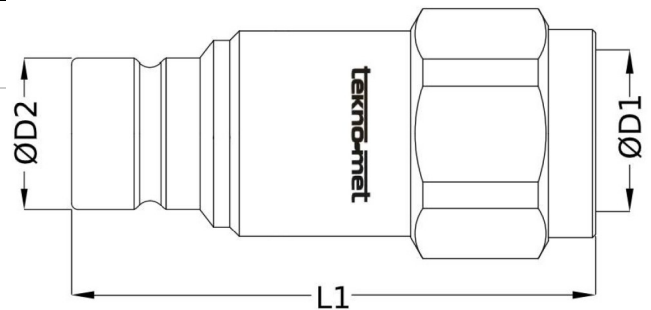

kód	velikost	D1	D2	L1	SW	těsnění
C4516/6-G14	6	G 1/4"	16	48	22	NBR
C4516/6-N14	6	NPT 1/4"	16	48	22	NBR
C4516/10-G38	10	G 3/8"	20	62	25	NBR
C4516/10-G12	10	G 1/2"	20	68	27	NBR
C4516/10-N38	10	NPT 3/8"	20	62	25	NBR
C4516/10-N12	10	NPT 1/2"	20	68	27	NBR
C4516/12-G12	12	G 1/2"	24,5	69	30	NBR
C4516/12-G34	12	G 3/4"	24,5	69	30	NBR
C4516/12-N12	12	NPT 1/2"	24,5	69	30	NBR
C4516/12-N34	12	NPT 3/4"	24,5	69	30	NBR
C4516/16-G34	16	G 3/4"	27	75	35	NBR
C4516/16-N34	16	NPT 3/4"	27	75	35	NBR
C4516/19-G1	19	G 1"	30	84	46	NBR
C4516/19-N1	19	NPT 1"	30	84	46	NBR
C4516/25-G114	25	G 1-1/4"		90	55	NBR
C4516/25-N114	25	NPT 1-1/4"		90	55	NBR