


C4516

Náustek s vnitřním závitem



Hydraulická rychlospojka dle ISO 16028


Pracovní teplota s NBR těsněním: -20°C do +100°C

Pracovní teplota s FPM těsněním: -20°C do +180°C (na poptání)

Materiál standardní verze:

Kalená ocel

Těsnění - NBR

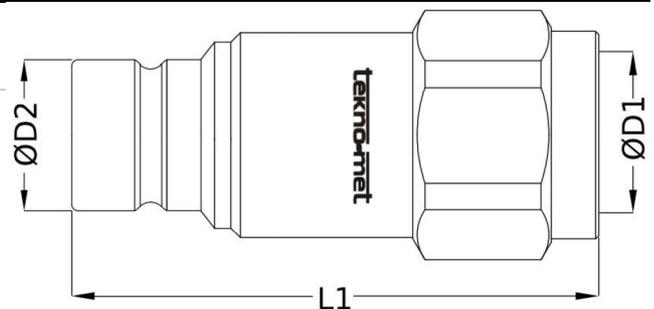

| kód | velikost | D1 | D2 | L1 | SW | těsnění |
|---------------|----------|------------|------|----|----|---------|
| C4516/6-G14 | 6 | G 1/4" | 16 | 48 | 22 | NBR |
| C4516/6-N14 | 6 | NPT 1/4" | 16 | 48 | 22 | NBR |
| C4516/10-G38 | 10 | G 3/8" | 20 | 62 | 25 | NBR |
| C4516/10-G12 | 10 | G 1/2" | 20 | 68 | 27 | NBR |
| C4516/10-N38 | 10 | NPT 3/8" | 20 | 62 | 25 | NBR |
| C4516/10-N12 | 10 | NPT 1/2" | 20 | 68 | 27 | NBR |
| C4516/12-G12 | 12 | G 1/2" | 24,5 | 69 | 30 | NBR |
| C4516/12-G34 | 12 | G 3/4" | 24,5 | 69 | 30 | NBR |
| C4516/12-N12 | 12 | NPT 1/2" | 24,5 | 69 | 30 | NBR |
| C4516/12-N34 | 12 | NPT 3/4" | 24,5 | 69 | 30 | NBR |
| C4516/16-G34 | 16 | G 3/4" | 27 | 75 | 35 | NBR |
| C4516/16-N34 | 16 | NPT 3/4" | 27 | 75 | 35 | NBR |
| C4516/19-G1 | 19 | G 1" | 30 | 84 | 46 | NBR |
| C4516/19-N1 | 19 | NPT 1" | 30 | 84 | 46 | NBR |
| C4516/25-G114 | 25 | G 1-1/4" | | 90 | 55 | NBR |
| C4516/25-N114 | 25 | NPT 1-1/4" | | 90 | 55 | NBR |