
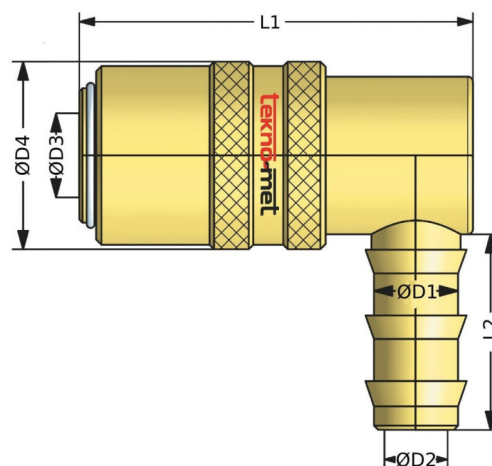


C4005_90

Rychlospojka s trnem pro nástrčnou hadici, 90°



| kód | D3 | D1 | D2 | D4 | L1 | L2 | uzavírací ventil |
|------------------|----|----|----|----|----|----|------------------|
| C4005-V/9-6-90 | 9 | 6 | 4 | 17 | 48 | 24 | ano |
| C4005/9-6-90 | 9 | 6 | 4 | 17 | 48 | 24 | ne |
| C4005-V/9-9-90 | 9 | 9 | 6 | 17 | 48 | 24 | ano |
| C4005/9-9-90 | 9 | 9 | 6 | 17 | 48 | 24 | ne |
| C4005-V/9-10-90 | 9 | 10 | 7 | 17 | 48 | 24 | ano |
| C4005/9-10-90 | 9 | 10 | 7 | 17 | 48 | 24 | ne |
| C4005-V/9-13-90 | 9 | 13 | 10 | 17 | 48 | 28 | ano |
| C4005/9-13-90 | 9 | 13 | 10 | 17 | 48 | 28 | ne |
| C4005-V/13-10-90 | 13 | 10 | 7 | 22 | 55 | 28 | ano |
| C4005/13-10-90 | 13 | 10 | 7 | 22 | 55 | 28 | ne |
| C4005-V/13-13-90 | 13 | 13 | 10 | 22 | 55 | 28 | ano |
| C4005/13-13-90 | 13 | 13 | 10 | 22 | 55 | 28 | ne |
| C4005-V/19-16-90 | 19 | 16 | 13 | 31 | 84 | 38 | ano |
| C4005/19-16-90 | 19 | 16 | 13 | 31 | 84 | 38 | ne |
| C4005-V/19-19-90 | 19 | 19 | 15 | 31 | 84 | 38 | ano |
| C4005/19-19-90 | 19 | 19 | 15 | 31 | 84 | 38 | ne |
| C4005-V/19-25-90 | 19 | 25 | 19 | 31 | 84 | 38 | ano |
| C4005/19-25-90 | 19 | 25 | 19 | 31 | 84 | 38 | ne |