

C5010

Střížník s pozounovou hlavou




Materiál: HSS (~1.3343), 64±2 HRC

Norma: DIN 5118, tvar A

Další velikosti razníků nebo výrobu z různých materiálů nabízíme na poptání.

Na přání zajistíme také povlakování (DLC, TiN, TiCN, TiAlN, CrN, AlCrN a mnoho dalších).

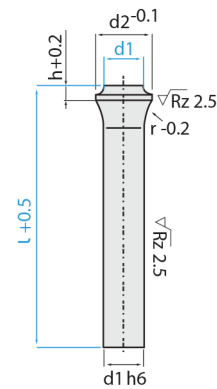

kód	d1	L	d2	h	r
C5010/3x71	3	71	4,5	3	6,5
C5010/3x80	3	80	4,5	3	6,5
C5010/3x90	3	90	4,5	3	6,5
C5010/3x100	3	100	4,5	3	6,5
C5010/3x120	3	120	4,5	3	6,5
C5010/4x71	4	71	5,5	4	8
C5010/4x80	4	80	5,5	4	8
C5010/4x90	4	90	5,5	4	8
C5010/4x100	4	100	5,5	4	8
C5010/4x120	4	120	5,5	4	8
C5010/5x71	5	71	7	4	10
C5010/5x80	5	80	7	4	10
C5010/5x90	5	90	7	4	10
C5010/5x100	5	100	7	4	10
C5010/5x120	5	120	7	4	10
C5010/6x71	6	71	9	4	10
C5010/6x80	6	80	9	4	10
C5010/6x90	6	90	9	4	10
C5010/6x100	6	100	9	4	10
C5010/6x120	6	120	9	4	10
C5010/8x120	8	120	11	4	12
C5010/10x71	10	71	14	4	15
C5010/10x80	10	80	14	4	15
C5010/10x90	10	90	14	4	15

kód	d1	L	d2	h	r
C5010/10x100	10	100	14	4	15
C5010/10x120	10	120	14	4	15
C5010/13x71	13	71	17	4	15
C5010/13x80	13	80	17	4	15
C5010/13x90	13	90	17	4	15
C5010/13x100	13	100	17	4	15
C5010/13x120	13	120	17	4	15
C5010/16x71	16	71	20	4	15
C5010/16x80	16	80	20	4	15
C5010/16x90	16	90	20	4	15
C5010/16x100	16	100	20	4	15
C5010/16x120	16	120	20	4	15
C5010/20x71	20	71	25	4	15
C5010/20x80	20	80	25	4	15
C5010/20x90	20	90	25	4	15
C5010/20x100	20	100	25	4	15
C5010/20x120	20	120	25	4	15